



Prior™ & Forma™

Modular Matting Systems for Entrance Areas



First brought to market by Milliken, this innovative concept offers a unique choice of modular tile matting systems designed to act as a primary barrier for dirt entering a building through pedestrian traffic – suitable for outdoor where Prior™ should be used and indoor where both Prior™ and Forma™ can be installed.

Prior™

Prior™ is a flexible multi-purpose flooring product. Installed as primary outdoor matting, fitted into matwells or applied to a variety of industrial and commercial tasks. The product structure incorporates resilient scrapers to remove particulate dirt.



Product Constructions

3 heel proof product constructions for optimum flexibility and maximum efficiency:

Prior™ 11C and Forma™ 11C

- closed construction to allow easy maintenance
- 11 mm thickness for installation in shallow matwells or surface mounted directly on the subfloor right next to any type of floor covering.

Prior™ 16 and Forma™ 16

- open structure for an efficient drainage and storage of dirt and moisture
- 16 mm thickness for installation in recessed matwells
- suitable for sites with heavy soiling conditions where regular deep cleaning maintenance regime is monitored.

Prior™ 16C and Forma™ 16C

- super heavy duty 16 mm thickness construction for installation in recessed matwells with high to extreme traffic conditions
- closed construction to allow easy and frequent maintenance.



Forma™ 16



Prior™ 16

Superior Textile Performance

The textile in Forma™ is constructed with two types of polyamide 6.6 high quality fibres:

- the multi filaments that capture moisture instantly when people walk on the mat.
- the mono filaments working as tough scrapers against dirt particles brought by shoes.

Edging System for Prior™ & Forma™

A simple and easy to assemble edging system is available for surface mounted installation.




Forma™

The combination of the patented Obex® textile inserts with the exclusive design of the Prior™ module produces a revolutionary matting system – unequalled in performance and unique in aesthetics: Forma™.



Forma™ Colour Range

Totally compatible with Prior™, Forma™ is available in the same Graphite colour. The textile inserts in Forma™ are available in 8 different colours – fully co-ordinated with Atrium Plus™ mats and runners.

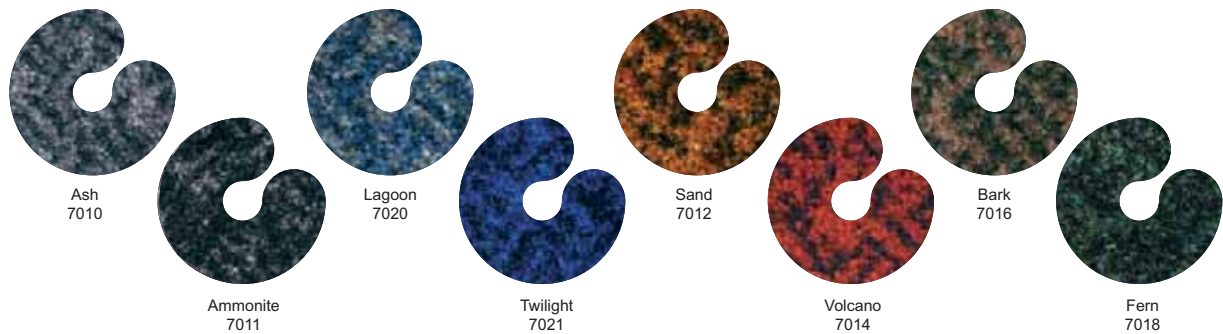

Easy to Install



Forma™ pre-assembled in 6 tile units



Quick to assemble with a hammer



Easy to cut with ruler and knife



Finished installation

Maintenance

Daily vacuum cleaning is recommended. Prior™ can be cleaned with high pressure water jet. Forma™: we advise periodic cleaning by injection/extraction method. Water temperature should not exceed 50°C. Cleaning frequency being related to foot traffic and soiling conditions.

Suitable for intense traffic up to 5,000 people per day.

5 Year
Wear
Guarantee

Technical Specifications

Product Information	Prior™ 11C	Prior™ 16	Prior™ 16C
Tile material	UV resistant PVC		
Tile construction	Closed	Open	Closed
Total thickness in mm	11	16	16
Total weight in kg per m ²	5.42	7.11	9.34
Safety	Friction test DS/EN ISO 8295 (2004)		
Outdoor temperature resistance	From – 30°C up to + 50°C		
Ozone resistance	50 pphm ozone 30°C		
Wear resistance – Vetterman test	22,000 cycles	66,000 cycles	66,000 cycles
Fire resistance test	BS 4790		
Fire classification - FR version	NA	Class C _{FL} -s2	NA
Tile size in mm	Nominal 200x200 – Useable 195x195 when installed		
Tile colour	Graphite		

Product Information	Forma™ 11C	Forma™ 16	Forma™ 16C
Tile material	UV resistant PVC		
Tile construction	Closed	Open	Closed
Total thickness in mm	11	16	16
Yarn type	100% Polyamide 6.6 – mono & multi filaments		
Yarn construction	High Twist and Heat Set combination of mono & multi filaments		
Textile weight in gms per m ²	1075	1075	1075
Total weight in kg per m ²	6.85	9.11	10.40
Textile Dyeing Technology	Millitron®		
Textile light fastness	Xenotest ISO 105-B01 : > 6 on blue scale		
Wear resistance – Vetterman test	22,000 cycles	66,000 cycles	66,000 cycles
Fire resistance test	BS 4790		
Tile size in mm	Nominal 200x200 – Useable 195x195 when installed		
Tile colour	Graphite		

Edging system Prior™ and Forma™

Edge strip of 40 cm long – connecting directly on Prior™ or Forma™ tiles.

Corners are made by cutting 2 pieces at 45° angle.

Colour: Graphite.

Not available for Prior™ 16C and Forma™ 16C.

Milliken Walk Off® Mats

Fabriksvej 5
DK-8544 Mørke
Denmark
T +45 87 85 85 85
F +45 87 85 86 00
www.millikenwom.com

United Kingdom Free phone 0800 964 569
Deutschland Free phone 0800 1813 688
France Free phone 0800 901 311

Customer Service Fax +45 87 85 85 10
info@milliken.dk

